

PVA MOP

euro★clean



PVA Mop Instructions

Remove plastic from surrounding sponge. Before each use soak mop sponge in warm water until entire sponge is soft all the way through. When finished — let air dry — PVA Mop sponge will dry hard.

To ring out PVA Mop, make sure sponge is completely soft, slowly pull back the finger formed handle to wring out water. Slowly push forward back into place.

Replacement Sponge Instructions


Use a Phillips-head screwdriver and unscrew the four screws that attach the sponge to the black frame between the wringers. Be sure to save the four screws. Next, remove old sponge and replace with new sponge using the same four screws.

Soak PVA Mop sponge in warm water until sponge is soft completely through.

The PVA Mop sponge is made of:

60% Polyethylene glycols
40% natural vegetable fibers

Telescopic Handle

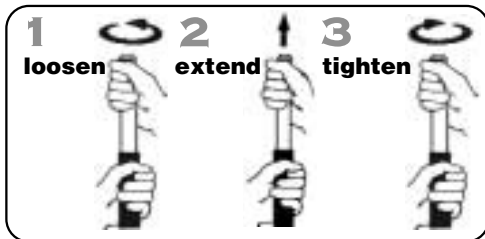

Jesco International Ltd., Inc.
1421 Westway Circle
Carrollton, Texas 75006-3733 USA
972-466-0849 • Fax 972-242-5888
888-554-4408 • Fax 800-492-5888
WWW.USJESCO.COM